


Outline Drawing

1	2	3	4	5	6
CUSTOMER P/N:			NOTES		
			Rev. DATE		
			V1.0 2022.04.15 New Issue		

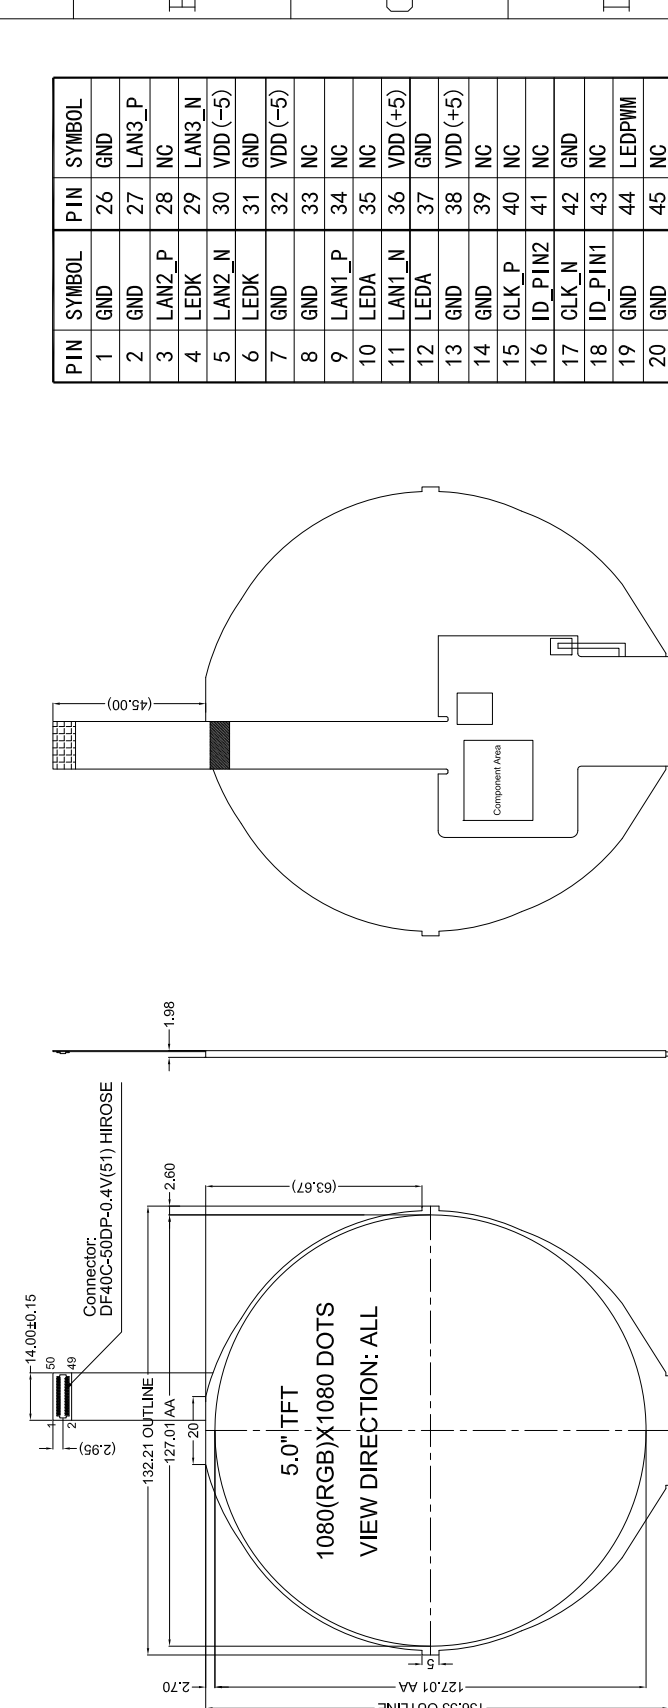

14.00±0.15
50
49
2
(2.95)
132.21 OUTLINE
127.01 AA
20
136.53 OUTLINE
127.01 AA
2.70
5.0" TFT
1080(RGB)X1080 DOTS
VIEW DIRECTION: ALL
2.60
63.67
1.98
45.00
Connector: DF40C-50DP-0.4V(51) HIROSE

LED BACKLIGHT CIRCUIT

A ○ □ △ ▽ ▹ ▸ ▹ ▸ ○ K
IF=20mA, VF=37.2V

PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL
1	GND	26	GND		
2	GND	27	LAN3_P		
3	LAN2_P	28	NC		
4	LEDK	29	LAN3_N		
5	LAN2_N	30	VDD (-5)		
6	LEDK	31	GND		
7	GND	32	VDD (-5)		
8	GND	33	NC		
9	LAN1_P	34	NC		
10	LEDA	35	NC		
11	LAN1_N	36	VDD (+5)		
12	LEDA	37	GND		
13	GND	38	VDD (+5)		
14	GND	39	NC		
15	CLK_P	40	NC		
16	ID_PIN2	41	NC		
17	CLK_N	42	GND		
18	ID_PIN1	43	NC		
19	GND	44	LEDPWM		
20	GND	45	NC		
21	LANO_P	46	TE		
22	IOVCC	47	GND		
23	LANO_N	48	RESET		
24	IOVCC	49	GND		
25	GND	50	GND		

Customer Approval		Drawn: Lucien
		Checked: <input type="checkbox"/>
		Approved: <input type="checkbox"/>
		Critical Dim. <input type="checkbox"/>
		Reference Dim. ()

DLC Display Co., Ltd		
Title	TFT LCM OUTLINE	Unit mm
Part No.	DLC0500FDP06MF-2	Scale 1:1
Revision	V1.0	Page 1/1
Date	2022-04-15	3 rd Angle

NOTES:

- 1.DISPLAY TYPE: 5.0" TFT
- 2.DISPLAY MODE: Transmissive, Normally black
- 3.VIEW DIRECTION: ALL
- 4.OPERATION TEMPERATURE: -20°C~+60°C
- STORAGE TEMPERATURE: -30°C~+70°C
- 5.DRIVER IC: HX8399C
- 6.GENERAL TOLERANCE: ±0.2
- 7.REQUIREMENT ON ENVIRONMENT PROTECTION: ROHS