

GMS-A43W-T

43" Wall Mounted Thin Display

Right Message At Right Time



Digital Signage is the remote-controlled distribution and playback of digital content (TV programs, advertising, menus, and every sort of information) on networks of displays. These displays can range from digital billboards to much smaller screens, either at a single location or across multiple sites. It's all about targeting the audience with relevant information. Digital signage enables users to display their messages more dynamically and targeted.

GMS has demonstrated a Digital Signage application on android platform. The application provides the features of updating the content from remote web browser, playback of video content, image, HTML web pages and scrolling text messages.




Description

- 43in Wall Mounted Thin Display
- Narrow bezel: 9.8mm, Ultra thin:18mm
- Resolution: 1920*1080
- Brightness: 400cd/m2
- Android 9.0 OS, 2G RAM,16G Storage
- USB X2
- Non-touch
- Support Horizontal & Vertical Installation
- Right Message At Right Time

43" Wall Mounted Thin Display

Dimension

GMS-A43W-T

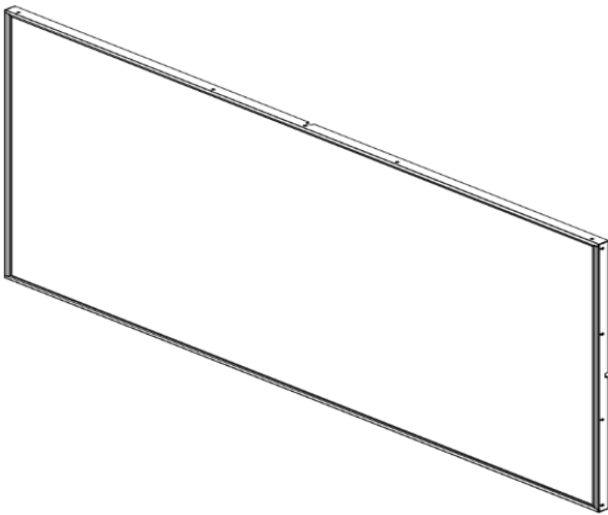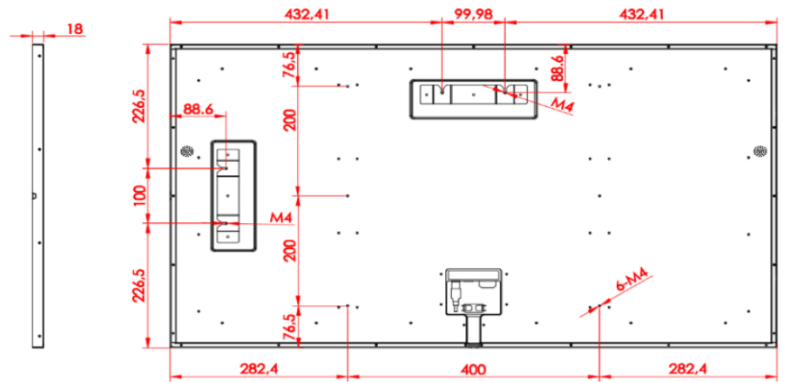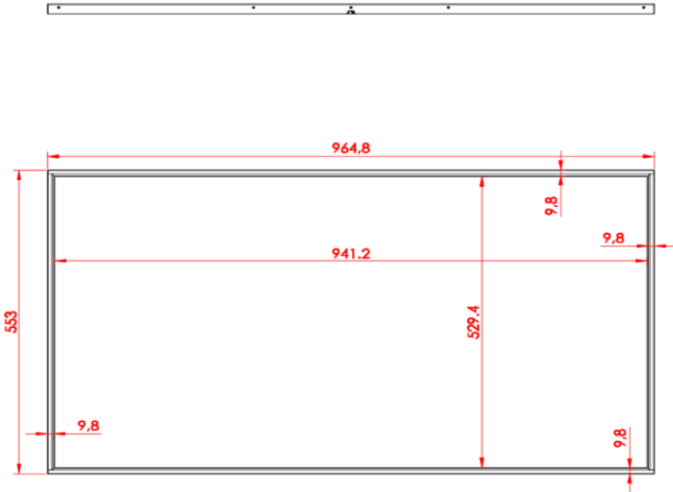

43" Wall Mounted Thin Display

GMS-A43W-T

Data

Specification:	
Model No.:	A43W-T
Panel	
LCD Panel Type	43in
Resolution	1920*1080
Backlight	LED
Brightness	400nits
Contrast Ratio	1200:1
Color Depth	8 bits
Response Time	6 ms (typ)
Viewing Angle	89/89/89/89
Light Life Time	50,000 hrs (typ.)
POWER	
Power Supply	External
Power Adaptor	DC24V 3A
Rated Voltage	100 V ~ 240 V, 50 Hz / 60 Hz
Power Consumption	60W
Language	English
ENVIRONMENT	
Operating Temperature	-20° C ~ 60° C
Storage Temperature	-10° C ~ 60° C
Humidity	10% ~ 80% RH Non-condensing
INTERNAL PLAYER	
Processor	Amlogic T972, Quad-core, 1.8GHz
Main memory interface	2GB DDR3
Graphics	ARM Mali-T764 500MHz
Storage (FDM)	eMMC 16GByte(2GB occupied by o/s)
Multimedia	H.264 encoder/decoder, MPEG-1/2/4, H.263,H.264 MVC, AVS, VC-1, VP8/6, RV
IO ports	USB 2.0 x2, DC Cable 3M
Operating system	Android 9.0
Network	WLAN 802.11 b/g/n (2.4GHz)
ENVIRONMENT	
Storage Temp	(-20 -- 65 degree)
Working Temp	(0 -- 50 degree)
Storage/Working Humidity	(10 -- 90%)
CERTIFICATION	
CE, FCC&Rohs	CE, FCC&Rohs
MECHANICAL SPECS	
Orientation	Portrait / Landscape
Cabinet Color	Black
Dimension (LxHxD)	965.6*553.8*18mm
CTN Dimension (LxHxD)	111*19*70cm
Weight (N.W)	11kg
Weight (G.W)	17kg