


49" Wall Mounted Thin Display - 4K

Right Message At Right Time

GMS-A49W-T

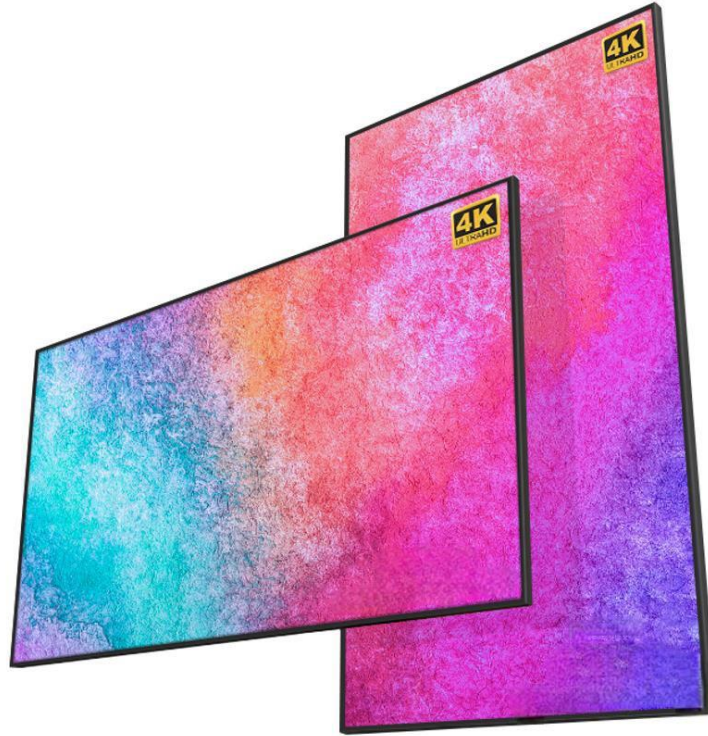

Digital Signage is the remote-controlled distribution and playback of digital content (TV programs, advertising, menus, and every sort of information) on networks of displays. These displays can range from digital billboards to much smaller screens, either at a single location or across multiple sites. It's all about targeting the audience with relevant information. Digital signage enables users to display their messages more dynamically and targeted.

GMS has demonstrated a Digital Signage application on android platform. The application provides the features of updating the content from remote web browser, playback of video content, image, HTML web pages and scrolling text messages.


Description

- 49in Wall Mounted Thin Display - 4K
- Narrow bezel: 9.8mm, Ultra thin:18mm
- Resolution: 3840*2160
- Brightness: 400cd/m2
- Android 9.0 OS, 2G RAM,16G Storage
- USB X2
- Non-touch
- Support Horizontal & Vertical Installation
- Right Message At Right Time

49" Wall Mounted Thin Display - 4K

GMS-A49W-T

Dimension

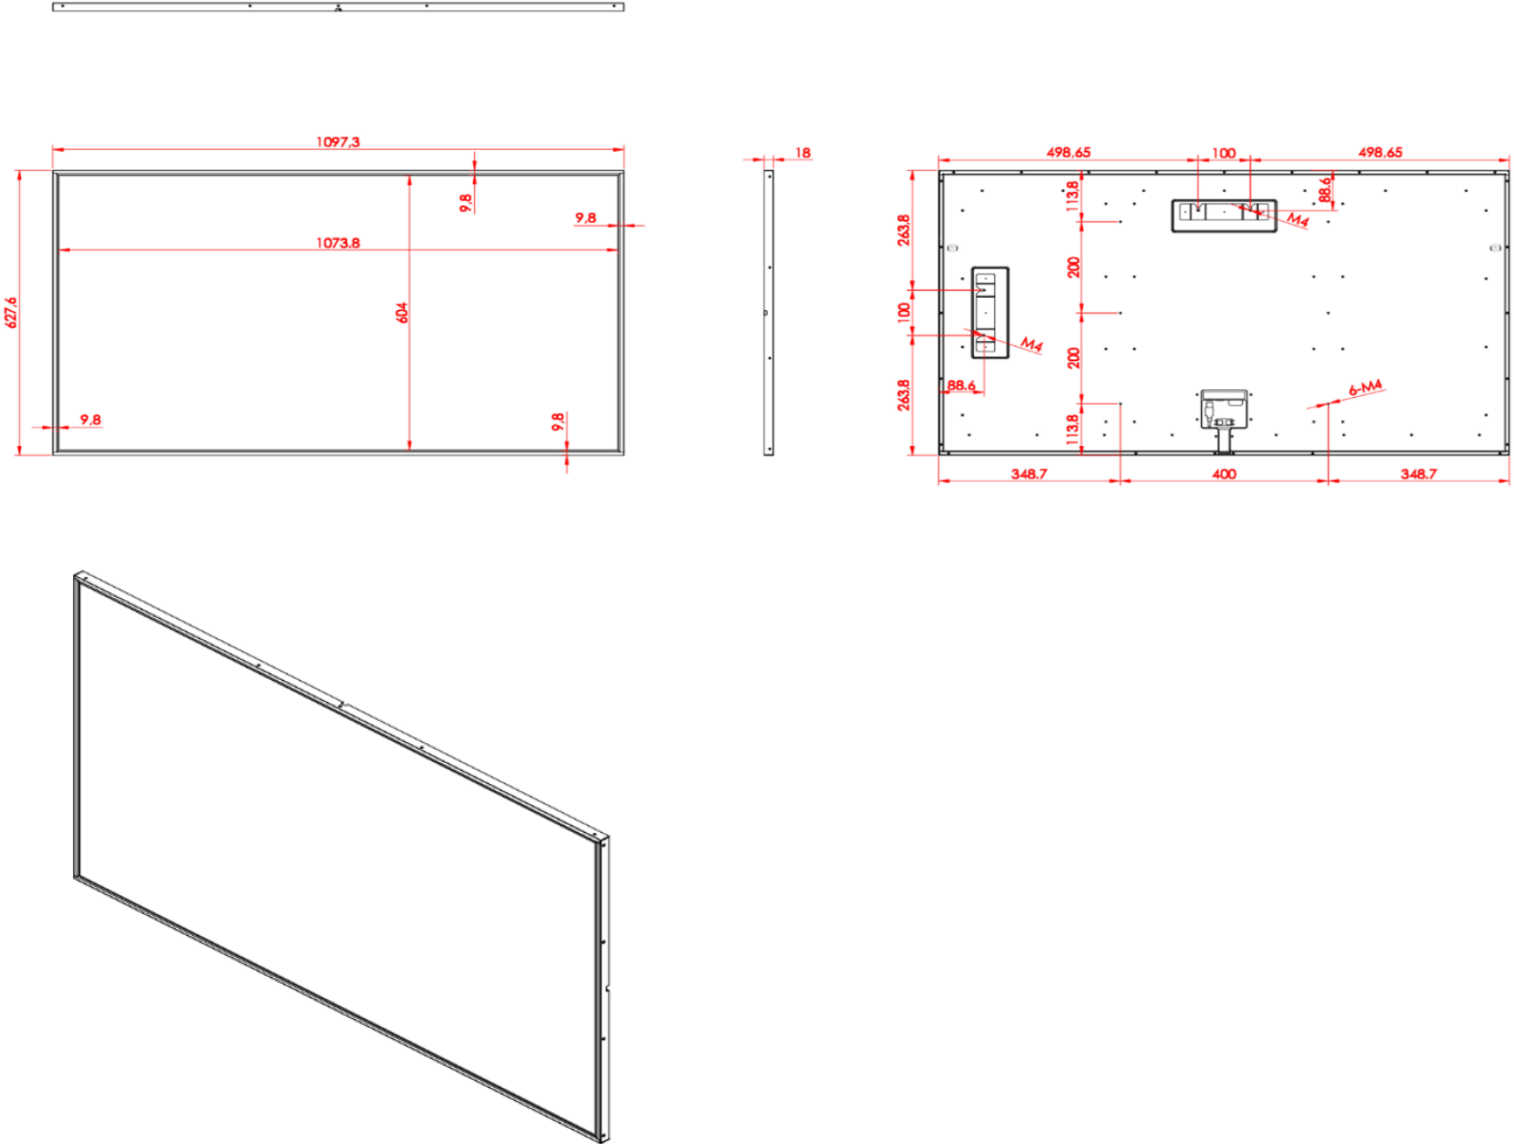

49" Wall Mounted Thin Display - 4K

GMS-A49W-T

Data

Specification:	
Model No.:	A49W-T
Panel	
LCD Panel Type	49in
Resolution	3840*2160
Backlight	LED
Brightness	400nits
Contrast Ratio	1200:1
Color Depth	8 bits
Response Time	6 ms (typ)
Viewing Angle	89/89/89/89
Light Life Time	50,000 hrs (typ.)
POWER	
Power Supply	External
Power Adaptor	DC24V 5A
Rated Voltage	100 V ~ 240 V, 50 Hz / 60 Hz
Power Consumption	95W
Language	English
ENVIRONMENT	
Operating Temperature	-20° C ~ 60° C
Storage Temperature	-10° C ~ 60° C
Humidity	10% ~ 80% RH Non-condensing
INTERNAL PLAYER	
Processor	Amlogic T972, Quad-core, 1.8GHz
Main memory interface	2GB DDR3
Graphics	ARM Mali-T764 500MHz
Storage (FDM)	eMMC 16GByte(2GB occupied by o/s)
Multimedia	H.264 encoder/decoder, MPEG-1/2/4, H.263,H.264 MVC, AVS, VC-1, VP8/6, RV
IO ports	USB 2.0 x2, DC Cable 3M
Operating system	Android 9.0
Network	WLAN 802.11 b/g/n (2.4GHz)
ENVIRONMENT	
Storage Temp	(-20 -- 65 degree)
Working Temp	(0 -- 50 degree)
Storage/Working Humidity	(10 -- 90%)
CERTIFICATION	
CE, FCC&Rohs	CE, FCC&Rohs
MECHANICAL SPECS	
Orientation	Portrait / Landscape
Cabinet Color	Black
Dimension (LxHxD)	1097.3*627.6*18mm
CTN Dimension (LxHxD)	125*19*80cm
Weight (N.W)	14kg
Weight (G.W)	19kg