

GMS-A43BR

43" Outdoor Digital Signage Right Message At Right Time



Digital Signage is the remote-controlled distribution and playback of digital content (TV programs, advertising, menus, and every sort of information) on networks of displays. These displays can range from digital billboards to much smaller screens, either at a single location or across multiple sites. It's all about targeting the audience with relevant information. Digital signage enables users to display their messages more dynamically and targeted.


GMS has demonstrated a Digital Signage application on android platform. The application provides the features of updating the content from remote web browser, playback of video content, image, HTML web pages and scrolling text messages.

Description

- 43in Digital Poster, no touch
- Resolution:1920*1080
- Brightness:1500cd/m2
- Viewing angle:89/89/89/89
- Android 9.0 OS, 2G RAM,16G Storage, With WIFI
- Metal casing, tempered glass
- Built-in 1pc Rechargeable Battery,last for 18hrs for indoor
- For outdoor, it last for 14hrs.
- 43Ah battery capability
- Recharging takes 8hrs

43" Outdoor Digital Signage

GMS-A43BR

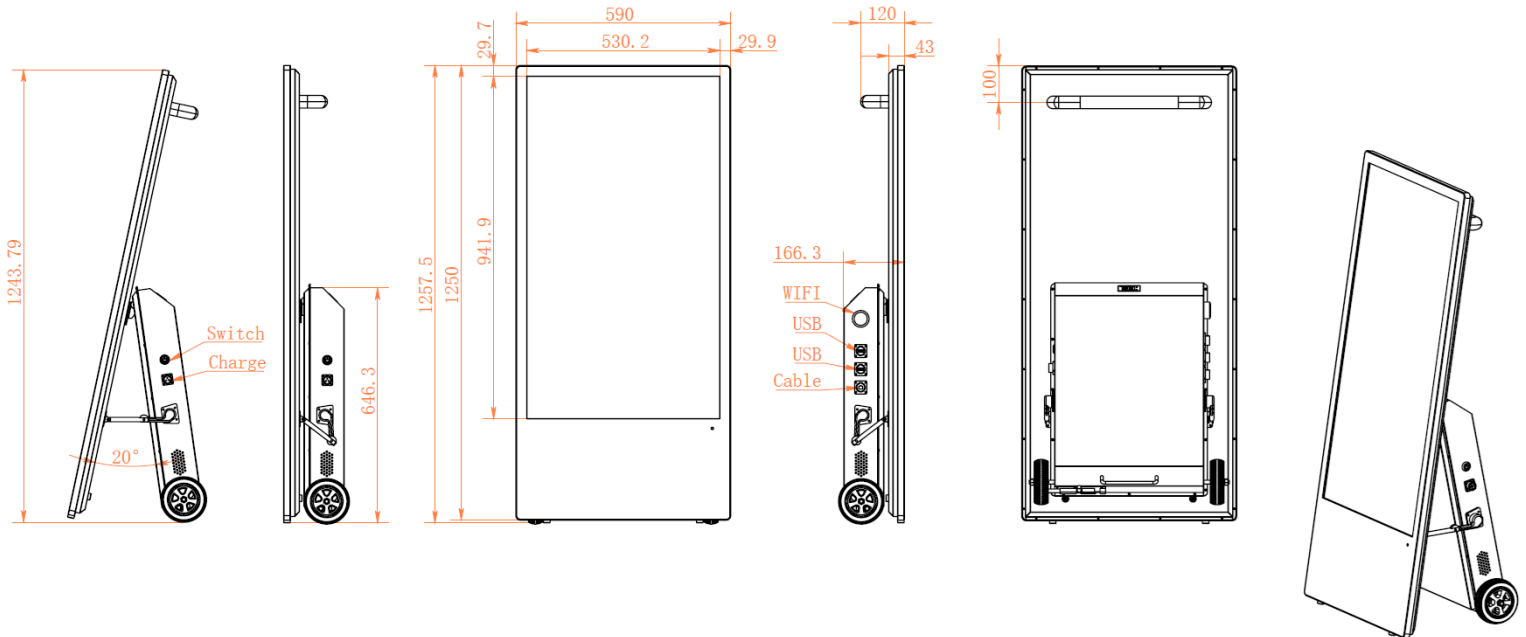

Specification:	
Model No.:	GMS-A43BR
Panel	
LCD Panel Type	43inch
Resolution	1920*1080
Backlight	LED
Brightness	1500nits
Contrast Ratio	1200:1
Color Depth	8 bits
Response Time	8 ms (typ)
Viewing Angle	178° / 178°
Light Life Time	50,000 hrs (typ.)
POWER	
Power Supply	Internal
Rated Voltage	100 V ~ 240 V, 50 Hz / 60 Hz
Rechargeable Battery	43Ah battery capability
Power Consumption	<90W
USER INTERFACE	
Language	English / Multi Language option
I/O PORTS	
HDMI	YES
Audio	N/A
ENVIRONMENT	
Operating Temperature	-20° C ~ 60° C
Storage Temperature	-10° C ~ 60° C
Humidity	10% ~ 80% RH Non-condensing

INTERNAL PLAYER	
Processor	Quad core, main frequency 1.8 GHz
Main memory interface	2GB DDR3
Graphics	ARM Mali-T764 500MHz
Storage (FDM)	eMMC 16GByte(2GB occupied by o/s)
Multimedia	H.264 encoder/decoder, MPEG-1/2/4, H.263,H.264 MVC, AVS, VC-1, VP8/6, RV
IO ports	USB 2.0 x2, micro SD slot x1
Operating system	Android 7.1 / 9.0
Network	WLAN 802.11 b/g/n (2.4GHz) ,RJ45
ENVIRONMENT	
Storage Temp	(-20 -- 65 degree)
Working Temp	(0 -- 50 degree)
Storage/Working Humidity	(10 -- 90 %)
CERTIFICATION	
CE, FCC&Rohs	
MECHANICAL SPECS	
Orientation	Portrait
Cabinet Color	Black
Dimension (LxHxD)	1257X590mm
CTN Dimension (LxHxD)	1370x280x680mm
Weight (N.W)	39KG
Weight (G.W)	43KG

Remark:

- 1 The Manufacturer has compatible CMS management publish software with android firmware
- 2 If customer take use of 3rd party app based on Manufacturer android hardware, pls make test firstly, and consider intergration between hardware &software (app). For android os, theoretically speaking, it's not 100% work perfectly when a new software (app) running on a specific hardware.
- 3 The Manufacturer may help to test new app (3rd party app) and adjust firmware. But we won't be held responsible for any inaccuracies of this kind of intergration issue.