


## 65" Wall Mounted Display

Right Message At Right Time

GMS-A65W

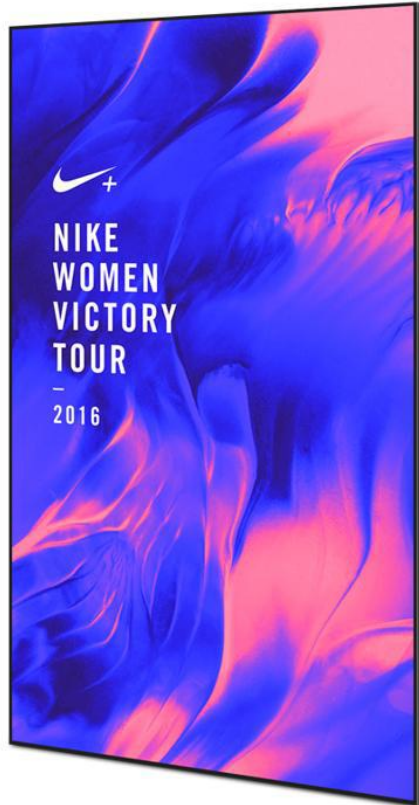

Digital Signage is the remote-controlled distribution and playback of digital content (TV programs, advertising, menus, and every sort of information) on networks of displays. These displays can range from digital billboards to much smaller screens, either at a single location or across multiple sites. It's all about targeting the audience with relevant information. Digital signage enables users to display their messages more dynamically and targeted.

GMS has demonstrated a Digital Signage application on android platform. The application provides the features of updating the content from remote web browser, playback of video content, image, HTML web pages and scrolling text messages.


### Description

- 65in Wall Mounted Display
- Resolution:3840\*2160
- Brightness:400nits
- Quad-core Cortex-A55 up to 2.0GHz
- Operating temperature, -20 to 60 degree
- Viewing angle:178° / 178°
- Android 11, 2G DDR3,16G Storage, WLAN 802.11 b/g/n (2.4GHz) ,RJ45
- Portrait / Landscape orientation

## 65" Wall Mounted Display

### Dimension

GMS-A65W

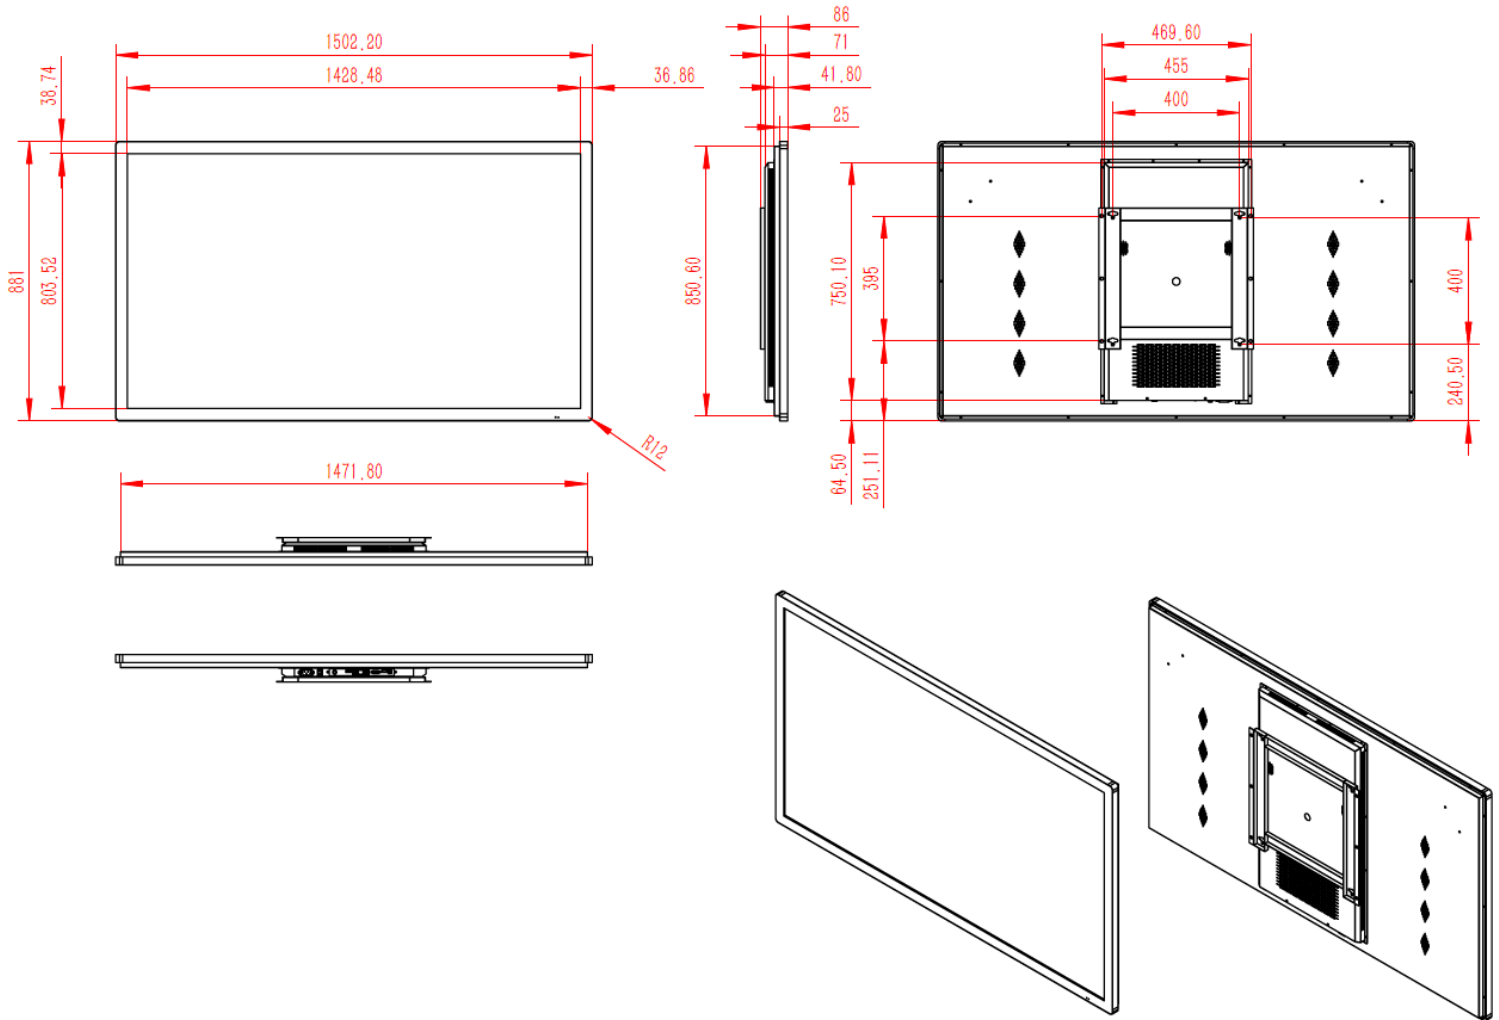

## 65" Wall Mounted Display

GMS-A65W

Data

<b>Specification:</b>	
Model No.:	A65W
<b>Panel</b>	
LCD Panel Type	65inch
Resolution	3840*2160
Backlight	LED
Brightness	400nits
Contrast Ratio	1400:1
Color Depth	8 bits
Response Time	8 ms (typ)
Viewing Angle	178° / 178°
Light Life Time	50,000 hrs (typ.)
<b>POWER</b>	
Power Supply	Internal
Rated Voltage	100 V ~ 240 V, 50 Hz / 60 Hz
Power Consumption	180W
<b>USER INTERFACE</b>	
Language	English
<b>ENVIRONMENT</b>	
Operating Temperature	-20° C ~ 60° C
Storage Temperature	-10° C ~ 60° C
Humidity	10% ~ 80% RH Non-condensing
<b>INTERNAL PLAYER</b>	
Processor	Quad-core Cortex-A55 up to 2.0GHz
Main memory interface	2GB DDR3
Graphics	Mail-G52
Storage (FDM)	EMMC 16GB
Multimedia	H.264 encoder/decoder, MPEG-1/2/4, H.263,H.264 MVC, AVS, VC-1, VP8/6, RV
IO ports	USB3.0*2, micro SD slot x1
Operating system	Android 11
Network	WLAN 802.11 b/g/n (2.4GHz) ,RJ45
<b>ENVIRONMENT</b>	
Storage Temp	(-20 -- 65 degree)
Working Temp	(0 -- 50 degree)
Storage/Working Humidity	(10 -- 90 % )
<b>CERTIFICATION</b>	
CE, FCC&RoHS	CE, FCC&RoHS
<b>MECHANICAL SPECS</b>	
Orientation	Portrait / Landscape
Cabinet Color	Black
Dimension (LxHxD)	151.7x89.2*8.6cm
CTN Dimension (LxHxD)	163x19x101cm
Weight (N.W)	52kg
Weight (G.W)	59kg

**Remark:**

- 1 The Manufacturer has compatible CMS management publish software with android firmware
- 2 If customer take use of 3rd party app based on Manufacturer android hardware, pls make test firstly, and consider intergration between hardware &software ( app). For android os, theoretically speaking, it's not 100% work perfectly when a new software (app) running on a specific hardware.
- 3 The Manufacturer may help to test new app (3rd party app) and adjust firmware. But we won't be held responsible for any inaccuracies of this kind of integration issue.

**Delivery Statement:**

- 1 Pls check the goods before sign the package bill, and ask for reimbursement for any damage. Without the logistic Damage Declaration Paper, Manufacturer is out of responsibility.
- 2 Please check the good when received, and inform the seller within 3 days if any quality issue (The man-made damage and misusing damage is not under warranty)
- 3 Don't dismantle the products without professional instruction from Manufacturer. Otherwise Manufacturer will be out of responsibility and warranty policy for any damage.