


32in Wall Mounted Thin Display -2K

GMS-A32W-T

Right Message At Right Time

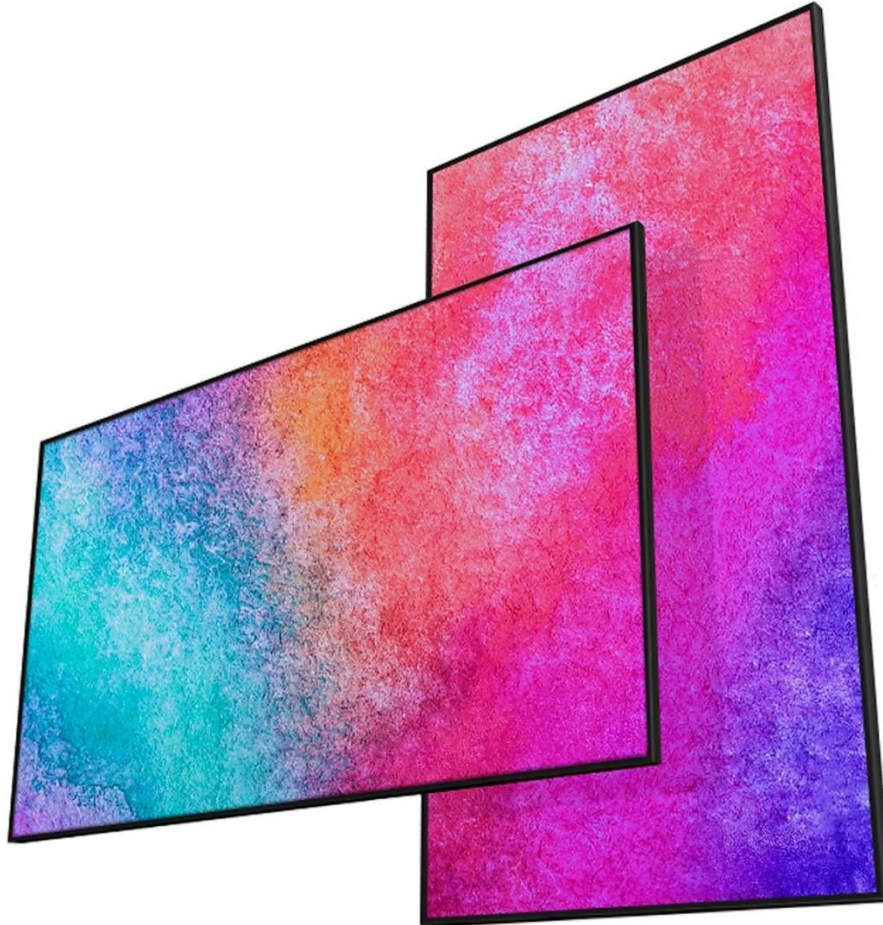

Digital Signage is the remote-controlled distribution and playback of digital content (TV programs, advertising, menus, and every sort of information) on networks of displays. These displays can range from digital billboards to much smaller screens, either at a single location or across multiple sites. It's all about targeting the audience with relevant information. Digital signage enables users to display their messages more dynamically and targeted.

GMS has demonstrated a Digital Signage application on android platform. The application provides the features of updating the content from remote web browser, playback of video content, image, HTML web pages and scrolling text messages.


Description

- 32in Wall Mounted Thin Display -2K
- Narrow bezel: 9.8mm, Ultra-thin:18mm
- Resolution1920*1080
- Brightness:400nits
- Android 9.0 OS, 2G RAM,16G Storage
- USB X2
- Non-touch
- Support Horizontal & Vertical Installation

32in Wall Mounted Thin Display -2K

GMS-A32W-T

Dimensions

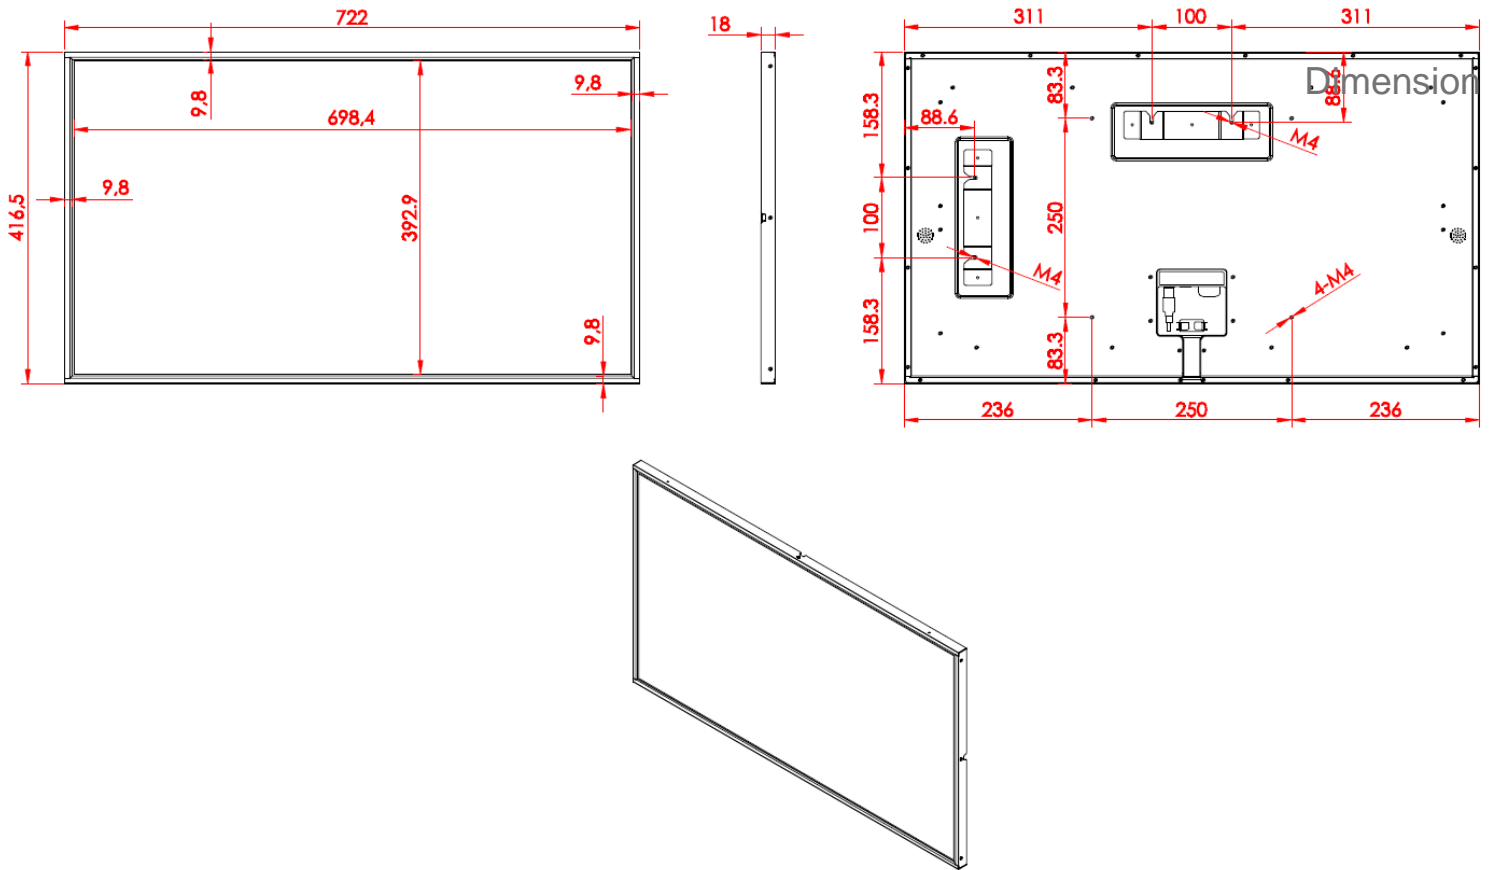

32in Wall Mounted Thin Display -2K

GMS-A32W-T

Data

Specification:	
Model No.:	A32W-T
Panel	
LCD Panel Type	32in
Resolution	1920*1080
Backlight	LED
Brightness	400nits
Contrast Ratio	1200:1
Color Depth	8 bits
Response Time	6 ms (typ)
Viewing Angle	89/89/89/89
Light Life Time	50,000 hrs (typ.)
POWER	
Power Supply	External
Power Adaptor	DC24V 3A
Rated Voltage	100 V ~ 240 V, 50 Hz / 60 Hz
Power Consumption	43W
USER INTERFACE	
Language	English
ENVIRONMENT	
Operating Temperature	-20° C ~ 60° C
Storage Temperature	-10° C ~ 60° C
Humidity	10% ~ 80% RH Non-condensing
INTERNAL PLAYER	
Processor	Amlogic T972, Quad-core, 1.8GHz
Main memory interface	2GB DDR3
Graphics	ARM Mali-T764 500MHz
Storage (FDM)	eMMC 16GByte(2GB occupied by o/s)
Multimedia	H.264 encoder/decoder, MPEG-1/2/4, H.263,H.264 MVC, AVS, VC-1, VP8/6, RV
IO ports	USB 2.0 x2, DC Cable 3M
Operating system	Android 9.0

Network	WLAN 802.11 b/g/n (2.4GHz)
ENVIRONMENT	
Storage Temp	(-20 -- 65 degree)
Working Temp	(0 -- 50 degree)
Storage/Working Humidity	(10 -- 90%)
CERTIFICATION	
CE, FCC&Rohs	CE, FCC&Rohs
MECHANICAL SPECS	
Orientation	Portrait / Landscape
Cabinet Color	Black
Dimension (LxHxD)	72.2*41.6*1.8cm
CTN Dimension (LxHxD)	87*19*57cm
Weight (N.W)	7kg
Weight (G.W)	12kg

Remark:

- 1 The Manufacturer has compatible CMS management publish software with android firmware
- 2 If customer take use of 3rd party app based on Manufacturer android hardware, pls make test firstly, and consider intergration between hardware &software (app). For android os, theoretically speaking, it's not 100% work perfectly when a new software (app) running on a specific hardware.
- 3 The Manufacturer may help to test new app (3rd party app) and adjust firmware. But we won't be held responsible for any inaccuracies of this kind of integration issue.

Delivery Statement:

- 1 Pls check the goods before sign the package bill, and ask for reimbursement for any damage. Without the logistic Damage Declaration Paper, Manufacturer is out of responsibility.
- 2 Please check the good when received, and inform the seller within 3 days if any quality issue (The man-made damage and misusing damage is not under warranty)
- 3 Don't dismantle the products without professional instruction from Manufacturer. Otherwise Manufacturer will be out of responsibility and warranty policy for any damage.